

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 July 2003 (24.07.2003)


PCT

(10) International Publication Number  
**WO 03/059781 A1**

- (51) International Patent Classification<sup>7</sup>: **B65D 81/36**
- (21) International Application Number: PCT/EP03/00375
- (22) International Filing Date: 16 January 2003 (16.01.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
102 01 840.5 18 January 2002 (18.01.2002) DE
- (71) Applicant (for all designated States except US): **MARS INCORPORATED** [US/US]; 6885 Elm Street, 22101-388 McLean (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HOMANN, Sabine** [DE/DE]; Claviusstr. 40, 96047 Bamberg (DE).
- (74) Agents: **WINKLER, Andreas** et al.; Boehmert & Boehmert, Hollerallee 32, 28209 Bremen (DE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PACKING UNIT COMPRISING INTERCONNECTION MEANS

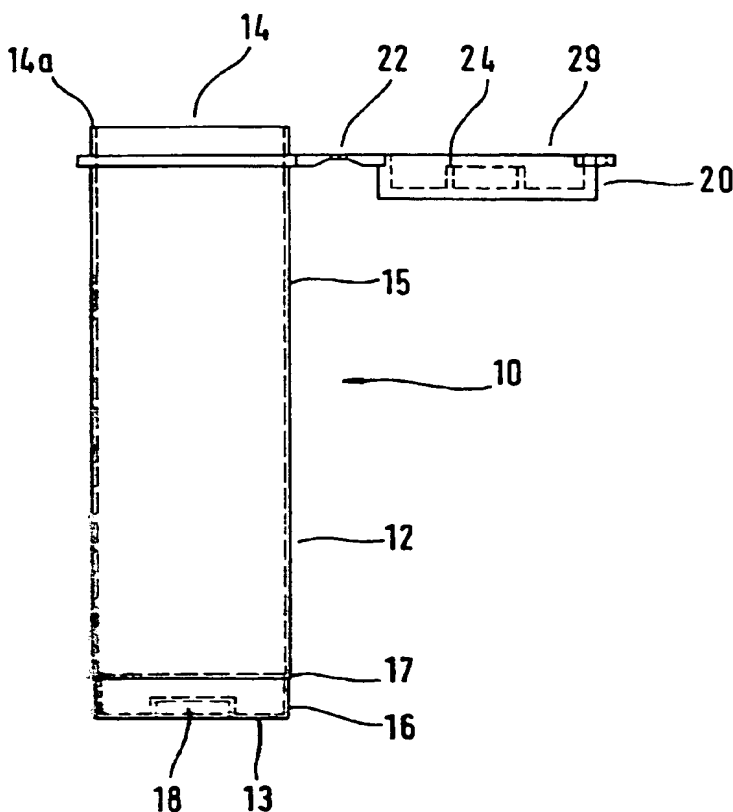

(57) Abstract: A packaging unit (10) comprising a container body (12) with a closed lower end (13), an open upper end (14) and side walls (15) between them; and a cap (20) for closing the open end (14) of the container body (12), which is pivotably attached thereto; wherein a floor section (16) of the container (12) body adjacent to the lower end (13) thereof is designed such that said floor section (16) can be inserted, to a predetermined extent, into the open end (14) of another packaging unit, and means (18, 24) are provided for optionally alternatively connecting the floor section (16) of the container body (12) to the cap (20) of another packaging unit.

WO 03/059781 A1

W 03/059781 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

---

PACKAGING UNIT COMPRISING INTERCONNECTION MEANS

---

The invention relates to a novel packaging unit comprising a container body with a closed lower end and an open upper end with side walls between them, and a cap for closing the open end of the container body, which is pivotably attached thereto.

Packaging units of this kind, mainly made from a plastic material, are known in the state of the art for packaging a wide variety of different products, including sweets.

Although the main purpose of such packaging units is to hold the goods concerned, products are also known on the market and from the state of the art which at the same time offer an additional benefit, namely in order to be used as an assembly construction kit for children. U.S. Patent No. 5,447,249, for example, discloses containers with interlocking parts at the upper and lower ends of the container, which can be connected together. This kind of container, however, requires the possibility of undertaking considerations regarding the shape and/or appearance of the container, in order to provide the additional functionality, which increases the effort and expense involved in production, and the aesthetic appearance is impaired.

In some local markets, packaging units for sweets are sold which make it possible to connect the containers together so that they can be used as assembly construction kits for children once they have been emptied, and are provided with floor sections in two different shapes, one shape facilitating the insertion of the floor section into the open end of another container and the other shape making it possible to connect the floor section to the inside of the cap of another container. For this purpose, if it is intended to insert the floor section of the container into the open end of another container, the diameter of the floor section is reduced, but is provided, at the lower end, with an outwardly extending rim. Alternatively the diameter of the lower end is somewhat larger than the diameter of the rest of the container and is provided with a circular groove so that it fits over a corresponding circular rim on the inside of the cap. To illustrate this more clearly, drawings of such prior-art containers are provided in the attached Figs. 1 and 2. The two types of

container cannot be exchanged for one another in use, i.e. those containers whose floor sections fit into the open end of another container cannot be used to be connected to the cap of that container, whereas those containers whose floor sections are designed such that they can be connected to the inside of the cap, cannot be inserted into the open end of another container. The disadvantage of this system is that a consumer wishing to use the container as an assembly construction kit for children needs a sufficient number of both types of containers, in order for this additional benefit to be possible.

The problem underlying the present invention is therefore to provide a packaging unit of the above-mentioned type, offering complete flexibility in the use of the empty packaging units as assembly construction kits for children.

This object is achieved by a packaging unit of the above-mentioned type in which a floor section of the container body adjacent to the lower end thereof is designed such that said floor section can be inserted, to a predetermined extent, into the open end of another packaging unit, and means are provided for optionally alternatively connecting the floor section of the container body to the cap of another packaging unit.

In a preferred embodiment, the cross-sectional area of the floor section of the container body is smaller than the cross-sectional area of the open end thereof, it being most preferred that a step is provided between the floor section and the rest of the side walls of the container body, in order to abut the upper edge of the open end of the container body of another packaging unit when the floor section is inserted therein.

At least a part of the means for connecting the floor section of the container body to the cap of another packaging unit is preferably provided in the lower end of the container body, said means most preferably comprising at least one indentation in the lower end of the container body in order to engage with at least one projection on the inside of the cap of another packaging unit.

In a most preferred embodiment, the container body possesses a circular cross-sectional area at least in the floor section and at the open end thereof.

Preferably, the packaging unit is manufactured from a plastic material, most preferably a polypropylene polymer.

In a preferred embodiment, the packaging unit is manufactured by injection moulding.

Designing the floor section of the container body in accordance with the invention so that it can be simultaneously inserted into the open end or alternatively attached to the cap of another container, preferably on the inside thereof, provides for the first time complete flexibility for making additional use of such a packaging unit as an assembly construction kit for children.

Further advantages and details of the invention will become clearer when considering the following description of a specific embodiment, which is illustrated in the drawings.

Fig. 1 is a side view of one embodiment of the prior-art container described above;

~~Fig. 2~~ is a perspective view of the other embodiment of the prior-art container described above;

~~Fig. 3~~ is a side cross-section of a preferred embodiment of the container of the present invention;

~~Fig. 4~~ is a plan view of the embodiment of Fig. 3.

~~Fig. 5~~ illustrates an embodiment of the prior-art container 1 described above, which has a floor ~~section~~ with a reduced diameter and, at the lower end thereof, an outwardly extending rim 6.

This floor section 5 is designed such that it can be inserted into the open end 7 of another container, the rim 6 making a tight fit possible.

A further embodiment of the prior-art container described above is illustrated in Fig. 2. This container 1' has a floor section 5' with a different shape, namely with a circular groove 8', so that it can be fitted over a corresponding prominent ring 3' on the inside of the cap 2.

In contrast to this system with reduced flexibility in use, a preferred embodiment of the packaging unit according to the present invention is illustrated in Figs. 3 and 4. The packaging unit 10 comprises a container body 12 with a closed lower end 13 and an open upper end 14, and side walls 15 between them. Although the embodiment of Figs. 3 and 4 is made cylindrical, the invention is not limited to such a shape. Instead, any other cross-sectional shape can be used, such as rectangular, square or some other polygonal shape.

A cap 20 is attached integrally to the container body 12 in order to close the open end 14 thereof. In the drawing, the packaging unit 10 is shown in an open position, i.e. the cap 20 has been removed from the open end 14. The cap 20 and container body 12 are connected via a flexible land 22, which could be of any shape and form and is not restricted to the form shown in the drawing.

A floor section 16 of the container body 12 is reduced in diameter, by 0.5 mm, for example, in order to enable this floor section to be insertable into the open end 14 of another container body 12. In order to limit the extent to which it can be inserted into the open end 14, a step 17 is provided in the preferred embodiment between the floor section 16 with the reduced diameter and the rest of the side walls 15 of the container body 12, so that said step abuts the upper edge 14a of the open end 14 of the container body when the floor section 16 is inserted there.

In addition, an indentation 18 is provided in the lower end 13. This indentation 18 is dimensioned such that it fits tightly over a corresponding annular projection 24 which is provided on the inside 29 of the cap 20 of the packaging unit. The invention is not, however, limited to such a specific embodiment. Alternatively any other connection means can be provided in the floor

section 16 of the container body 12 and/or on the cap 20, in order to make it possible to connect the packaging units together.

The system of the present invention is characterised by complete flexibility, since only one type of packaging unit is necessary to make it possible either to insert the floor section thereof into the open end of another packaging unit or, alternatively, to connect the floor section of the container body to the cap of another packaging unit. The system of the present invention therefore makes the packaging unit more flexible and attractive with regard to its additional use as an assembly construction kit for children.

Although the invention is not restricted to any specific material, suitable materials include plastic materials, such as thermoplastic materials, e.g. polypropylene or polyethylene. Preferably, the complete packaging unit is made from this plastic material and is manufactured using well-known and established techniques, such as injection moulding.

Injection moulding the plastic material also provides total flexibility with regard to the weight of the packaging unit, which ought to be a compromise between low weight and stability. Furthermore, injection moulding provides flexibility in determining the appropriate thickness of the side walls of the container, which, on the one hand, influences the weight of the container and, on the other hand, makes it possible to manufacture a container body with a certain flexibility when compressed, which in turn permits a kind of "self-opening" of the container. A "self-opening" of this kind is achieved by squeezing the container body, thus increasing the internal pressure such that the cap "flips open", without the need even to touch the cap.

Controlling the flexibility of the container body in this way by adjusting the thickness of its walls ~~enhances~~ the ease of using the packaging unit and increases its attractiveness, especially for children ~~due~~ because of the "flipping-open effect".

The features disclosed in the above description, in the claims and/or in the attached drawings can be essential to implementing the invention in its various forms both individually and in any combination.



Claims

## 1. A packaging unit (10) comprising

a container body (12) with a closed lower end (13), an open upper end (14) and side walls (15) between them; and

a cap (20) for closing the open end (14) of the container body (12), pivotably attached thereto;

a floor section (16) of the container body (12) adjacent to the lower end (13) thereof is designed such that said floor section (16) can be inserted, to a predetermined extent, into the open end (14) of another packaging unit, and means (18, 24) are provided for optionally alternatively connecting the floor section (16) of the container body (12) to the cap (20) of another packaging unit.

2. The packaging unit as claimed in Claim 1, characterised in that the cross-sectional area of the floor section (16) of the container body is smaller than the cross-sectional area of the open end (14) thereof.
3. The packaging unit as claimed in Claim 2, characterised in that a step (17) is provided between the floor section (16) and the rest of the side walls (15) of the container body (12), in order to abut the upper edge (14 a) of the open end (14) of the container body (12) of another packaging unit when the floor section (16) is inserted therein.
4. The packaging unit as claimed in any of Claims 1 to 3, characterised in that at least one part (13) of the means for connecting the floor section (16) of the container body (12) to the cap (20) of another packaging unit is provided in the lower end (13) of the container body.

5. The packaging unit as claimed in Claim 4, characterised in that said means comprises at least one indentation (18) in the lower end (13) of the container body (12) in order to engage with at least one projection (24) on the inside of the cap (20) of another packaging unit.
6. The packaging unit as claimed in any of the preceding claims, characterised in that the container body (12) possesses a circular cross-sectional area at least in the floor section (16) and at the open end (14) thereof.
7. The packaging unit as claimed in any of the preceding claims, characterised in that the packaging unit is manufactured from a plastic material.
8. The packaging unit as claimed in Claim 7, characterised in that the plastic material is a polypropylene polymer.
9. The packaging unit as claimed in Claim 7 or Claim 8, characterised in that the packaging unit is manufactured by injection moulding.

1 / 2

Fig. 1


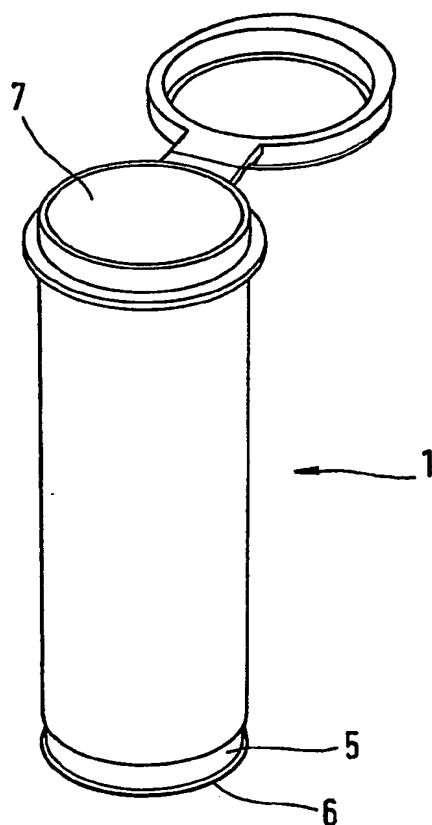


Fig. 2

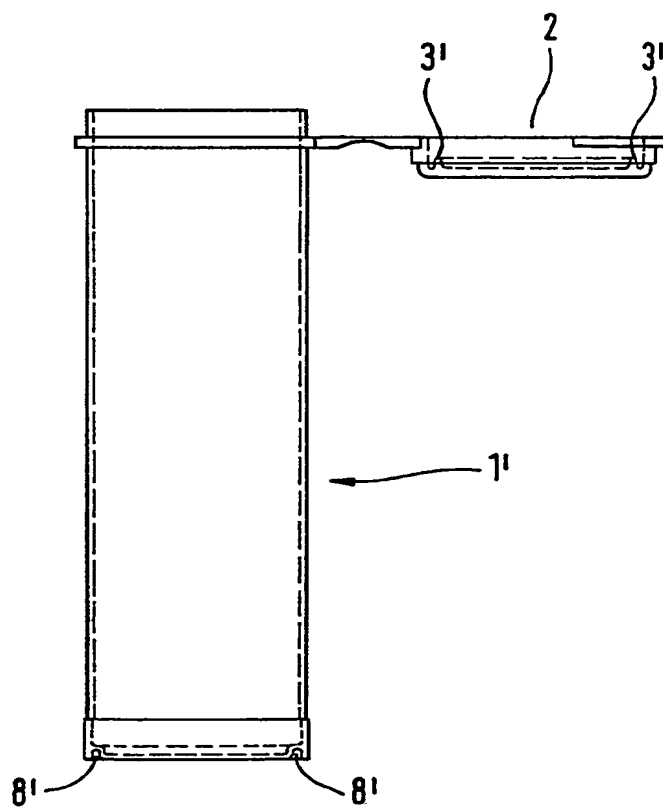

2 / 2

Fig.3


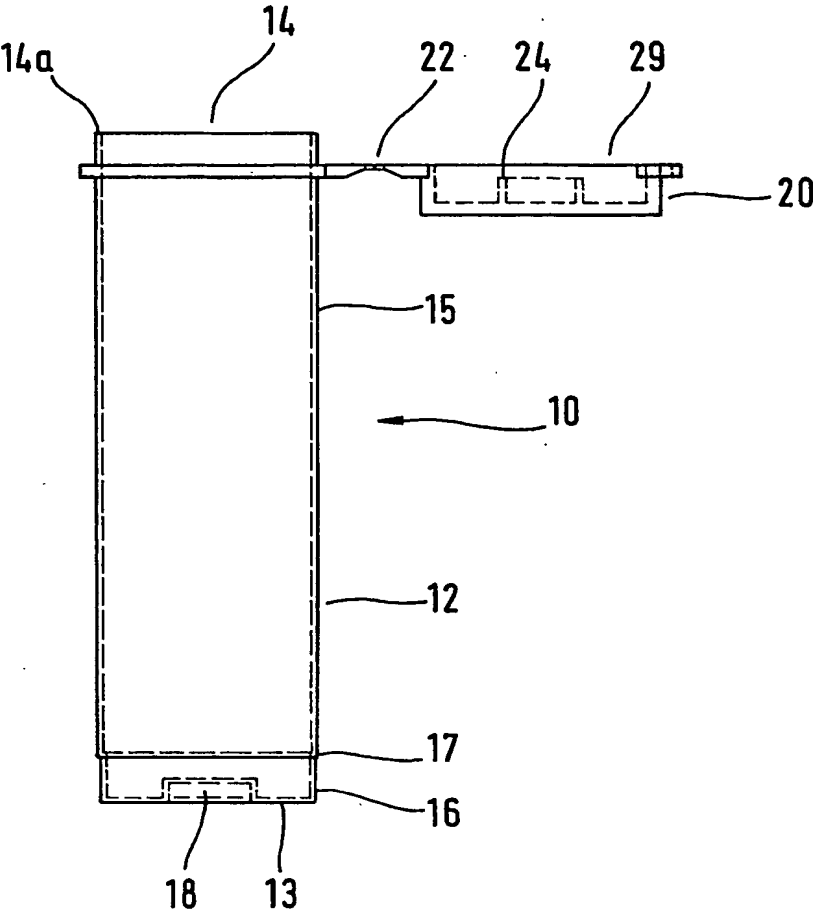


Fig.4

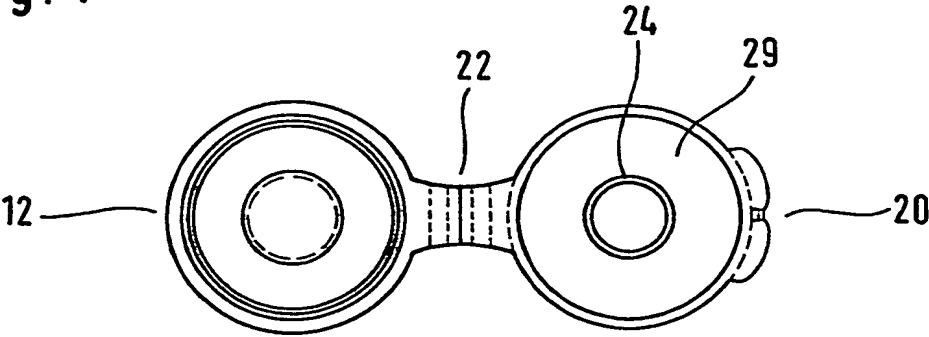

## INTERNATIONAL SEARCH REPORT

PCT/EP 03/00375

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B65D81/36

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B65D A63H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	WO 02 28736 A (OSTROWSKI MARK JOSEPH ;CAPITOL VIAL INC (US); CROY RANDALL CHRISTO) 11 April 2002 (2002-04-11) page 4, line 13 -page 6, line 12; claims 1,3; figures 1,2	1-9
X	US 5 890 595 A (CREDLE JR WILLIAM S) 6 April 1999 (1999-04-06) column 3, line 14 - line 29; figures 1,2	1,2,4
X	US 5 312 011 A (FISCHER DAN E) 17 May 1994 (1994-05-17) column 3, line 59 -column 5, line 55; figures 4,5	1,2,4,7, 8
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another claim or other special reason (as specified)
- \*O\* document relating to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of completion of the international search

11 April 2003

Date of mailing of the international search report

09/05/2003

Mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
44 - 2280 HV Rijswijk  
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Fitterer, J

## INTERNATIONAL SEARCH REPORT

PCT/EP 93/00375

## C.(Continuation) DOCUMENTS CONSIDERED RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 928 839 A (KRUELSKIE DONALD A) 29 May 1990 (1990-05-29) column 2, line 50 -column 5, line 26; figures 1-11 ---	1-4,6,7, 9
X	GB 1 145 924 A (BIG DRUM INC) 19 March 1969 (1969-03-19) page 1, line 90 -page 2, line 76; figures 1-5 -----	1-4,6-9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

PCT/EP 03/00375

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0228736	A	11-04-2002	WO 0228736 A1	11-04-2002
			AU 7991500 A	15-04-2002
			BR 0016141 A	06-08-2002
US 5890595	A	06-04-1999	US 5709304 A	20-01-1998
			US 5676251 A	14-10-1997
			US 5876776 A	02-03-1999
US 5312011	A	17-05-1994	NONE	
US 4928839	A	29-05-1990	AU 5723990 A	08-04-1991
			EP 0490899 A1	24-06-1992
			JP 5500492 T	04-02-1993
			WO 9103402 A1	21-03-1991
GB 1145924	A	19-03-1969	NONE	